## TELESKID 2TS-7T 3TS-8W 3TS-8T 4TS-8T





OPERATING WEIGHT

9,914 - 13,000 lb

(4,497 - 5,897 kg)

GROSS ENGINE POWER
74-109 HP
(55-81 kW)

RATED OPERATING

CAPACITY

2096 – 3999 lb

(951 – 1814 kg)

## UNRIVALLED VERSATILITY

With a high reach capability of over 13 feet and forward reach of over 6 feet, now you can go places and do things other skid steers can't.



### **GREATER CONTROL**

The 7-way multifunction joystick makes it easy to control a wide range of hydraulic attachments.



### UNRIVALLED PRODUCTIVITY

The JCB Teleskid can do the work of four machines in one - a forklift, telehandler, compact wheel loader and skid steer loader, providing unbeatable productivity.





#### **WORK SMARTER**

A zero turning radius allows you to work productively in confined areas with ease.


### UNRIVALLED STRENGTH

With a high strength, telescopic steel boom, reliable components and extreme weather testing, the Teleskid has been designed and constructed to provide maximum performance.



### UNBEATABLE SERVICEABILITY

A tilting cab design and large rear service door make daily maintenance quick and easy.

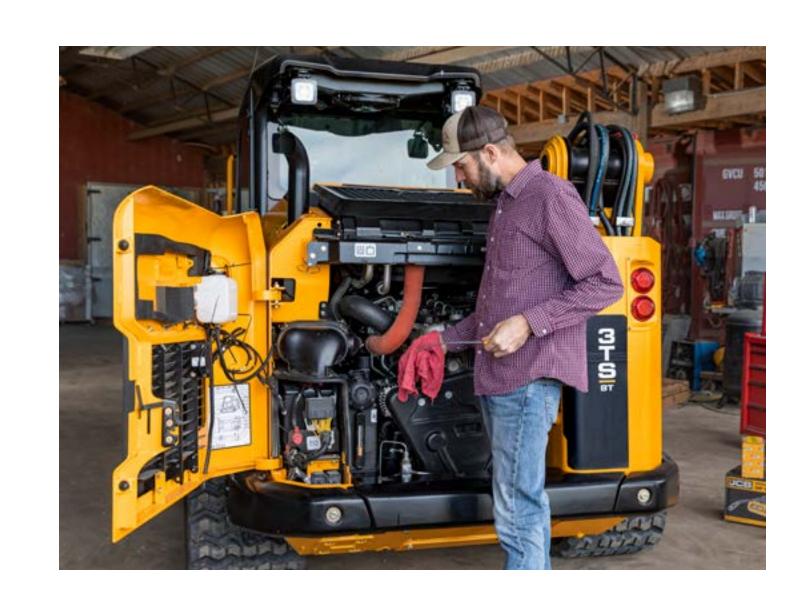

### UNRIVALLED COMFORT AND CONTROL

With the largest cab on the market and electric over hydraulic controls, the JCB Teleskid offers unbeatable comfort and control.





#### **ACHIEVE MORE**

The JCB Smoothride System and parallel lift ensures greater load retention and operator comfort.

## UNRIVALLED SAFETY

The side door access allows for safe entry and exit without having to climb over potentially dangerous attachments, as on competitor machines with front entry.



### **GREATER VISIBILITY**

Visibility around the machine and to the attachment is 60% better than conventional twin arm machines.




### **TELESKID** 2TS-7T | 3TS-8W | 3TS-8T | 4TS-8T





### **SPECIFICATION**

| MODEL  | <b>2TS-7T</b> | 3TS-8W  | 3TS-8T  | 4TS-8T  |
|--|---------------|---------|---------|---------|
| SAE operating weight lb (kg)                 | 9,914         | 9,859   | 12,615  | 13,000  |
|  | (4,497)       | (4,472) | (5,722) | (5,897) |
| Dump height ft-in (m)                        | 7-6           | 10-4    | 10-8    | 12-9    |
|  | (2.3)         | (3.1)   | (3.2)   | (3.9)   |
| Rated operating capacity – retracted lb (kg) | 2096          | 3,208   | 3,695   | 3999    |
|  | (951)         | (1,455) | (1,676) | (1814)  |
| Rated operating lb (kg) capacity – extended  | 1,140         | 1,347   | 1,600   | 1878    |
|  | (517)         | (611)   | (725)   | (852)   |
| Overall height ft-in (m)                     | 6-7           | 6-11    | 6-11    | 6-10    |
|  | (2.0)         | (2.1)   | (2.1)   | (2.0)   |

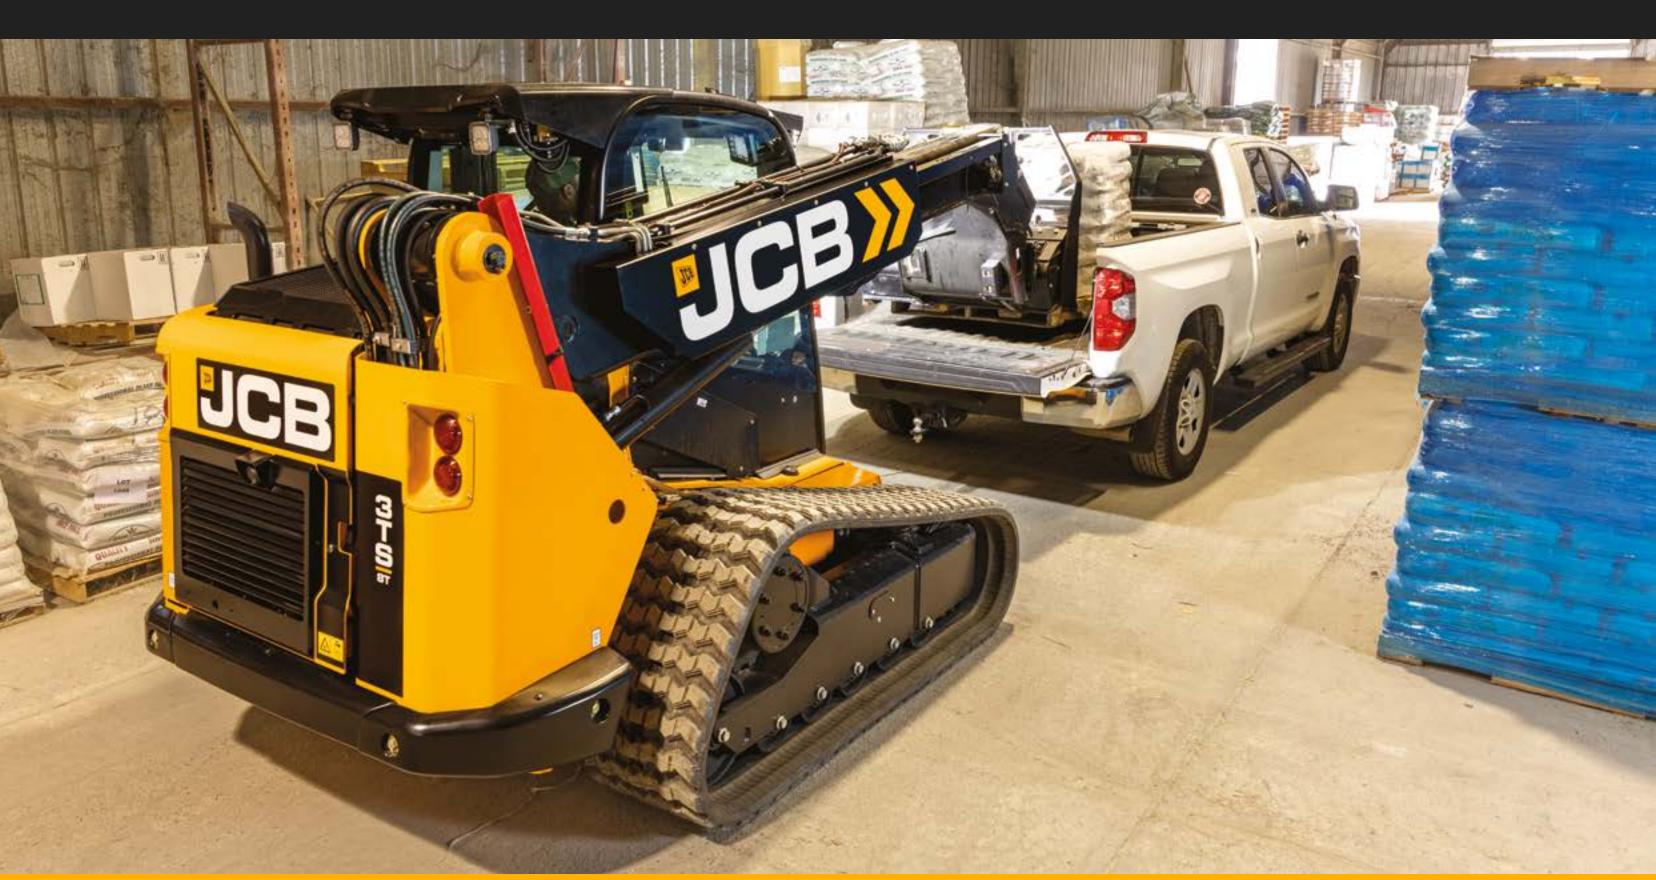

### STANDARD FEATURES

- Seat mounted seven-way joysticks
- ISO H pattern change over
- 125 lpm high-flow hydraulics
- Electrical quick hitch
- Vinyl air-suspension heated seat
- LED lights: 4 front 2 rear
- Reversing fan
- 2-speed
- Livelink
- Reverse camera



# JCB TELESKID





